

BEST AVAILABLE COPY



REC'D 07 JAN 2005	
WIPO	PCT



IB/2005/050024



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

He Behen

Dated


1 November 2004

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Patents Form 1/77

Patents Act 1977
(Rule 16)

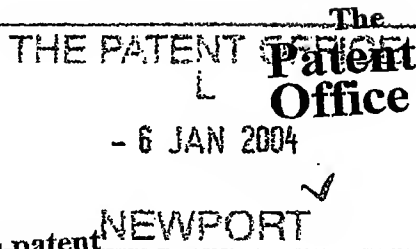

06JAN04 E863169-2 DO 375
P01/7700 0.00-0400107.9 NONE

1/77

Request for grant of a patent
(See notes on the back of this form. You can
also get an explanatory leaflet from the Patent
Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP10 8QQ

PHGB040002GBP

1. Your reference

2. Patent application number
(The Patent Office will fill in this part)

0400107.9 ✓

- 6 JAN 2004 ✓

3. Full name, address and postcode of the or of
each applicant (underline all surnames)

KONINKLIJKE PHILIPS ELECTRONICS N.V.
GROENEWOUDSEWEG 1
5621 BA EINDHOVEN
THE NETHERLANDS
07419294001 ✓

Patents ADP Number (if you know it)

If the applicant is a corporate body, give the
country/state of its incorporation

THE NETHERLANDS

4. Title of the invention

PRINTABLE TRANSPARENT ELECTRODES

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom
to which all correspondence should be sent
(including the postcode)

Philips Intellectual Property & Standards
Cross Oak Lane
Redhill
Surrey RH1 5HA

08359655001 ✓

Patents ADP number (if you know it)

6. If you are declaring priority from one or more
earlier patent applications, give the country
and the date of filing of the or of each of these
earlier applications and (if you know it) the or
each application number

Country

Priority Application number

Date of filing

7. If this application is divided or otherwise
derived from an earlier UK application, give
the number and the filing date of the earlier
application

Number of earlier application

Date of filing
(day/month/year)

8. Is a statement of inventorship and of right to
grant of a patent required in support of this
request? (Answer "Yes" if:
a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an
applicant, or
c) any named applicant is a corporate body.

YES

See note (d)

Copied from 10542906 on 06/25/2007

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document.

Continuation sheets of this form

Description	12
Claims(s)	4
Abstract	1
Drawings	2

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right

to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and

search (*Patents Form 9/77*)

Request for substantive examination

(*Patents Form 10/77*)

Any other documents

(*Please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

5/1/04

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 81 5280

P L WILLIAMSON

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered "Yes" Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

DESCRIPTION

PRINTABLE TRANSPARENT ELECTRODES

5 This invention relates to a method of forming transparent electrodes on a substrate. More particularly, this invention relates to a method of forming transparent electrodes on a substrate by gravure offset printing.

 This invention also relates to a thermally decomposable gravure offset printing ink composition for use in forming transparent electrodes on a
10 substrate, and a substrate having transparent electrodes formed by depositing the composition on a substrate by gravure offset printing.

 Display devices such as liquid crystal display (LCD) devices and plasma display panels (PDPs) comprise transparent substrates on which are formed
15 transparent conductive electrodes.

 By way of example, a known passive matrix LCD device is schematically shown, in section, in Figure 1. Referring to the Figure, the device 1 comprises parallel first and second transparent glass substrates 3, 5. The inner surface of the first substrate 3 is provided with an array of
20 transparent electrodes 7 arranged as rows, and the inner surface of the second substrate 5 is provided with an array of transparent electrodes 9 arranged as columns. The row and column electrodes 7, 9 comprise indium tin oxide (ITO), which is indium doped tin oxide that is conductive and transparent. The ITO has a particle size of less than the wavelength of visible
25 light.

 The device also comprises parallel light polarizing films 11, 13 disposed on the outer surfaces of the substrates 3, 5 and a backlight 15 adjacent one of the substrates.

 The row and column electrodes 7, 9 together define a matrix of regularly
30 spaced pixels. Each pixel comprises a stack of liquid crystals 17 aligned between the substrates 3, 5.

In use, a pixel does not normally transmit light from the backlight 15 because the liquid crystals 17 in the pixel rotate the polarized light through an angle, which polarized light is then absorbed by the polarizing film 13.

However, when a voltage is applied to both the row and column
5 electrodes 7, 9 of a pixel, the liquid crystals 17 in the pixel do not rotate the polarized light, and the polarizing film 13 transmits the polarized light.

Thus, an image is generated on the device 1 by sequentially applying a voltage to the row and column electrodes 7, 9 of a number of the pixels, which then transmit light that is incident from the backlight. The generated image
10 may then be observed from in front of the substrate 5.

The above description relates to the structure and operation of a passive monochrome LCD device. The structure and operation of a colour LCD device is similar, except that each pixel comprises three stacks of liquid crystals associated with respective red, green and blue filters, each stack of
15 liquid crystals is addressed by separate row or column electrodes. The structure and operation of an active matrix LCD device is also similar, except that each pixel also comprises switching circuitry, normally including a thin film transistor and a capacitor.

It is apparent from the above description that the substrates and at least
20 some of the electrodes used in display devices must be transparent to ensure that they consistently transmit sufficient light to generate a high quality image. It is also apparent that high resolution display devices must have transparent electrodes having a correspondingly high resolution and accuracy.

Known methods of manufacturing transparent substrates having
25 transparent electrodes having a high resolution and accuracy involve photolithography.

By way of example, the steps of one such known manufacturing method will be described. Firstly, a thin film of ITO is deposited on a transparent glass substrate by sputtering. Secondly, a layer of photoresist polymer is deposited
30 on top of the ITO film. Thirdly, a mask having a pattern representative of the desired electrode layout is placed above the photoresist layer and ultraviolet (UV) light is shone through the mask. Fourthly, the photoresist layer is

developed to remove areas that have been weakened by exposure to the UV light. Fifthly, exposed areas of the ITO are chemically etched to leave only the areas of ITO that are covered in photoresist. Finally, the photoresist is removed from the remaining areas of ITO to leave the desired transparent electrode pattern.

Although the known method described above provides transparent electrodes having a high resolution and accuracy, it has a number of drawbacks. Firstly, the large number of steps involved makes it time consuming and expensive. Secondly, the steps of depositing an ITO film and etching the ITO film make the method inherently inefficient. Thirdly, the etching process generates a large quantity of liquid waste, which is environmentally undesirable.

US5421926 and US6274412 disclose methods of printing ITO electrodes onto a transparent substrate. However, the ink is tailored for screen printing, and the electrodes are therefore prone to distortion. Accordingly, the method is not able to provide transparent electrodes having the high resolution and accuracy demanded by modern display device applications.

US531643 discloses a method of gravure offset printing ITO electrodes onto a transparent substrate. The electrodes are deposited on the transparent substrate as a mixture of indium 2-ethylhexanoate, tin p-toluate and butyl carbitol acetate (so-called resinate ITO), which is then heated at a high temperature (580°C) to form ITO. This high temperature thermal decomposition process renders the method unsuitable for use in the manufacture of most display devices as it may adversely affect other layers disposed on the substrate, such as thin film transistors of an active matrix display device. Secondly, the method may provide transparent electrodes having insufficient electrical conductivity, thus requiring the deposition of additional metal electrodes. Such additional complexity increases manufacturing costs.

According to an aspect of the invention, there is provided a method of forming transparent electrodes on a substrate, the method comprising the steps of: depositing a patterned layer of a thermally decomposable ink composition on a substrate by gravure offset printing; the thermally decomposable ink composition comprising an electrically conductive metal oxide having a particle size of less than the wavelength of visible light, a nitrocellulose binder, an alcohol solvent and an organic co-solvent having a boiling point of more than 250°C; and heating the thermally decomposable ink composition. Heating the thermally decomposable ink composition preferably comprises thermally decomposing the thermally decomposable ink composition.

Compared to known techniques involving photolithography, forming transparent electrodes by printing is a simple process that may lead to cost savings. It is also inherently more efficient and more environmental acceptable since no deposited material is etched away. The previous problems associated with printing transparent electrodes have also been overcome. In particular, it has been found that a gravure offset printing technique, using a suspension of electrically conductive metal oxide particles, is capable of providing transparent electrodes having the high resolution, accuracy and feature quality necessary for modern display device applications. This is because, unlike other printing techniques such as screen printing and conventional and waterless/dry offset printing, gravure offset printing is characterised by the combination of almost complete transfer of printing ink to the substrate, a high graphic quality and very low short and long range distortion. The specific thermally decomposable ink composition allows lower temperature thermal decomposition, which renders the method suitable for use in the manufacture of most display devices, since the thermal stresses on other layers that may be disposed on the substrate are minimised.

The metal oxide concentration and an rheology may be adjusted using methods that will be well know to persons skilled in the art. For example, this may be achieved by varying the respective proportions of metal oxide, solvent and binder. The metal oxide concentration affects the thickness of the

transparent electrodes after thermal decomposition. The rheology affects flow and splitting during pick-up and/or print-down, and thus affects resolution, print quality and accuracy during the printing process.

It has been found that alcohol solvents hold stable dispersions of metal oxide particles. It has also been found that nitrocellulose polymers are compatible with alcohol solvents.

It has also been found that the use of a co-solvent facilitates the transfer of almost all of the ink from a transfer blanket to the substrate during printing, thus resulting in higher print quality. This is because instead of splitting, full transfer from blanket to substrate takes place, thus resulting in straighter edges, less pinholes and a smoother printed surface. It has been found that co-solvents having boiling points greater than 250°C are most effective.

The metal oxide particles preferably have an average diameter of less than 0.1µm, and preferably a maximum diameter of less than 0.3µm. More preferably, the metal oxide particles have an average particle size in the range 3nm to 80nm. The metal oxide particles are preferably indium doped tin oxide particles. Compositions comprising such particles have been found to result in high quality and highly accurate transparent electrodes.

The boiling point of the solvent may be no more than 250°C. The boiling point of the solvent is preferably no more than 150°C, more preferably no more than 100°C, and most preferably no more than 50°C. The solvent is preferably at least one of an alkylalcohol, a monoalkyl ethyleneglycol and a monoalkyl propyleneglycol. The solvent is more preferably isopropoxyethanol.

The organic co-solvent is preferably at least one of an acetate, an alkylalcohol, an ester, a mono or dialkyl ether of an ethyleneglycol and a mono or dialkyl ether of a propyleneglycol. The organic co-solvent is more preferably at least one of tri propylene glycol and tetra ethylene glycol.

Preferably, the method further comprises the step of homogenising the thermally decomposable ink composition prior to the step of depositing the patterned layer of the thermally decomposable ink composition. This ensures

an even dispersion of particles and a homogeneous binder concentration within the composition, and ensures high quality transparent electrodes.

The step of depositing the patterned layer of the thermally decomposable ink composition preferably comprises the steps of: filling
5 patterned grooves in the surface of a cliché with the thermally decomposable ink composition; transferring the thermally decomposable ink composition from the patterned grooves to the surface of a blanket by bringing the blanket into contact with the surface the cliché; and transferring the thermally decomposable ink composition from the surface of the blanket to the surface of
10 the substrate by bringing the blanket in to contact with the surface of the substrate. Such steps have been found to provide high print quality with low distortion.

The step of thermally decomposing the thermally decomposable ink composition, which is required to obtain transparent electrodes having a high
15 electrical conductivity, preferably comprises firing the decomposable ink composition at a temperature of no more than 400°C, more preferably at a temperature of no more than 300°C, and most preferably at a temperature in the range 250°C to 300°C, in the presence of oxygen, for example in an air or pure oxygen atmosphere. Such a temperature is lower than those used in
20 known methods of forming transparent metal oxide electrodes by printing, and thus results in reduced thermal stresses and allows processing on standard substrates.

The step of thermally decomposing the thermally decomposable ink composition may specifically comprise the steps of: firing the thermally
25 decomposable ink composition in an air atmosphere at a temperature in the range 200°C to 400°C for at least 50 minutes; and firing the thermally decomposable ink composition in a reducing atmosphere of 7% hydrogen in nitrogen at a temperature in the range 200°C to 400°C for at least 50 minutes.

The thermally decomposable ink composition may alternatively be fired
30 at a higher temperature of up to 550°C in the presence of oxygen. Such a higher temperature provides transparent electrodes having a slightly higher

electrical conductivity. Because such a higher temperature involves significantly greater thermal stresses, the lower firing temperatures are preferred.

If a higher firing temperature is used, the step of thermally decomposing the thermally decomposable ink composition may specifically comprise the steps of: firing the thermally decomposable ink composition in an air atmosphere at a temperature in the range 500°C to 550°C for at least 50 minutes; and firing the thermally decomposable ink composition in a nitrogen atmosphere (<5ppm oxygen) at a temperature in the range 500°C to 550°C for at least 50 minutes.

The firing processes described above have been found to be effective in forming high quality transparent electrodes.

In applications where thermal stresses must be minimised, for example display devices having flexible substrates, the thermally decomposable ink composition may simply be dried, preferably at a temperature in the range 110°C to 130°C. Such a drying process provides transparent electrodes having a moderate conductivity. However, in general, firing of the thermally decomposable ink composition is preferred because it provides transparent electrodes having a high conductivity.

According to another aspect of the invention, there is provided a thermally decomposable gravure offset printing ink composition for use in forming transparent electrodes on a substrate, comprising: an electrically conductive metal oxide having a particle size of less than the wavelength of visible light; a nitrocellulose binder; an alcohol solvent; and an organic co-solvent having a boiling point of more than 250°C.

The electrically conductive metal oxide preferably has an average particle size of less than 0.1µm, and more preferably in the range 3nm to 80nm. The electrically conductive metal oxide is preferably indium doped tin oxide.

The solvent preferably comprises a polar and relatively moderately evaporating alcohol. The boiling point of the solvent may be no more than 250°C. The boiling point of the solvent is preferably no more than 150°C,

more preferably no more than 100°C, and most preferably no more than 50°C. Exemplary classes of suitable solvents include alkylalcohols, monoalkyl ethyleneglycols and monoalkyl propyleneglycols. The solvent more preferably comprises isopropoxyethanol.

5 The organic co-solvent preferably comprises at least one of an acetate, an alkylalcohol, an ester, a mono or dialkyl ether of an ethyleneglycol and a mono or dialkyl ether of a propyleneglycol. The organic co-solvent more preferably comprises at least one of tri propylene glycol and tetra ethylene glycol.

10 The nitrocellulose binder may contain from 10.7 to 12.6 wt% nitrogen, and preferably contains from 10.9 to 11.3 wt% nitrogen. The nitrocellulose binder preferably has a Cochiu viscosity (sec) of between 30 and 34 for 12 wt% in butanol, ethyl glycol, toluene and ethanol (the butanol, ethyl glycol, toluene and ethanol being in the ratio 1:2:3:4). For example, the nitrocellulose
15 binder is preferably nitrocellulose A400, A500, E740, E950, E1440, and preferably nitrocellulose A500, all supplied by Walsrode.

 The electrically conductive metal oxide particles are preferably 15 to 25 wt% of the composition. The solvent is preferably 45 to 60 wt% of the composition. The co-solvent is preferably 5 to 15 wt% of the composition. The
20 decomposable binder is preferably 15 to 25 wt% of the composition. It has been found that compositions formulated in this way have an optimal metal oxide concentration and an optimal rheology.

 The invention also provides a substrate having transparent electrodes formed by: depositing a patterned layer of the composition described above on
25 a substrate by gravure offset printing; and heating the composition to form the transparent electrodes.

 For a better understanding of the above features and advantages of the invention, embodiments will now be described, purely by way of example, with
30 reference to the accompanying drawings in which:

 Figure 1 schematically shows a known LCD device, in section;

Figure 2 schematically shows a method of forming transparent electrodes on a substrate according to the invention;

Figure 3 schematically shows a substrate having transparent electrodes according to the invention; and

5 Figure 4 is a microscopic image of a cross section of a substrate having transparent electrodes according to the invention.

Preparation of a thermally decomposable gravure offset printing ink composition for use in forming transparent electrodes on a substrate according
10 to the invention will first be described.

1.59g of tri propylene glycol (TPG) are added to 8.06g of 2-isopropoxy ethanol (IPE) containing 40 wt% nitrocellulose binder. The nitrocellulose binder contains between 10.9 and 11.3 wt% nitrogen, and has a Cochi viscosity (sec) of between 30 and 34 for 12 wt% in butanol, ethyl glycol, toluene and ethanol (the butanol, ethyl glycol, toluene and ethanol being in the
15 ratio 1:2:3:4). The nitrocellulose binder may, for example, be nitrocellulose A500 supplied by Walsrode.

This mixture is then mechanically homogenised by processing on a three-roll-mill for at least 12 hours. 8.02g of 43 wt% indium tin oxide
20 dispersion in IPE are then added to the mixture. The indium tin oxide particles have an average diameter of 25nm. The resulting mixture is mechanically homogenised by thorough mixing with a spatula. The mixture is further homogenised by processing on a three-roll-mill for 5 hours.

A method of forming transparent electrodes on a substrate using the
25 above composition according to the invention will now be described with reference to Figure 2.

Referring to the Figure, a glass substrate 19 is first cleaned in fuming nitric acid before being placed on a platform 21 of a gravure offset printing apparatus 23. The glass substrate has a thickness of 0.7mm.

30 A polymer cliché 25 is also placed on the platform 21 of the gravure offset printing apparatus 23. The surface of the polymer cliché 25 contains grooves 27 to a depth of 20µm that represent the desired pattern of

transparent electrodes to be formed on the substrate 19. Electroformed printing plates may be used in alternative embodiments. The grooves 27 in the surface of the polymer cliché 25 are filled with the thermally decomposable gravure offset printing ink composition 29 described above. The grooves 27 are filled using a thin steel doctoring blade travelling across the cliché at a surface speed of 0.1m/s under an indentation of 0.1mm.

The gravure offset printing apparatus 23 is fitted with a transfer blanket 31. The transfer blanket 31 has a silicone top layer having an increased smoothness compared to that of standard blankets. A fill may also be applied on the blanket cylinder before the blanket is mounted in order to provide an optimal blanket diameter.

Once the gravure offset printing apparatus 23 has been set up as described above, the thermally decomposable gravure offset printing ink composition 29 is printed onto the glass substrate 19 as described below.

The transfer blanket 31 is first rolled across the surface of the polymer cliché 25 so that the thermally decomposable gravure offset printing ink composition 29 in the grooves 27 is transferred to the surface of the transfer blanket 31. The transfer blanket 31 is rolled across the surface of the polymer cliché 25, for example, at a surface speed of 0.1 m/s under a transfer blanket indentation of 0.25mm.

Once the thermally decomposable gravure offset printing ink composition 29 has been transferred to the surface of the transfer blanket 31, the transfer blanket 31 is moved towards the glass substrate 19. The transfer blanket 31 is then rolled across the surface of the glass substrate 19 so that the thermally decomposable gravure offset printing ink composition 29 is transferred to the surface of the glass substrate 19. The transfer blanket 31 is rolled across the surface of glass substrate 19, for example, at a surface speed of 0.1 m/s under a transfer blanket indentation of 0.1mm.

The specific printing process and ink composition used result in almost all of the thermally decomposable gravure offset printing ink composition being transferred from the grooves in the surface of the cliché to the glass substrate,

thus ensuring a highly accurate print process with high resolution and feature quality.

Once the thermally decomposable gravure offset printing ink composition has been printed onto the glass substrate, the glass substrate is fired to thermally decompose the thermally decomposable gravure offset printing ink composition. Thermal decomposition causes the tri propylene glycol (TPG), the isopropoxy ethanol (IPE) and the nitrocellulose polymer binder to decompose and/or evaporate, leaving only the transparent indium tin oxide particles deposited on the surface of the glass substrate.

The glass substrate is first fired for 28 minutes in an air atmosphere at a temperature ramping up from 20°C to 300°C, followed by 60 minutes in the air atmosphere at 300°C. The glass substrate is then fired for 60 minutes in a reducing atmosphere of 7% hydrogen in nitrogen at 300°C, followed by 28 minutes in the reducing atmosphere at a temperature ramping down from 300°C to 20°C.

Figure 3 schematically shows a substrate 33 having transparent electrodes 35 that has been prepared according to the above method.

Straight transparent electrodes lines are shown, and it has been found that straight transparent electrode lines having widths of 235µm, 120µm and 88µm all have straight edges, thus indicating high accuracy, feature quality and resolution. The number of pinhole defects in the transparent electrodes has been observed to be minimal. The transparent electrodes also exhibited high transparency, low optical haze and high electrical conductivity.

The transparent substrate having transparent electrodes according to the invention has been assembled into a passive monochrome LCD device. Images generated by the assembled device have been observed to be of a high quality.

Figure 4 is a microscopic image of a cross section of a substrate having transparent electrodes according to the invention. It can be seen from Figure 4 that pore size is very small, thus preventing optical scattering, and

consequently providing high optical transparency. This is characteristic of electrodes provided by the invention.

It is to be understood that this detailed description discloses specific embodiments of a broader invention and is not intended to be limiting. There are many other embodiments within the scope of the invention as claimed hereafter, and these will be apparent to those skilled in the art.

For example, the exemplary method described above is devised for forming transparent electrodes on substrates in low volumes under laboratory conditions. However, it will be understood that the invention may also be applied to high volume industrial processes, such as active matrix LCD device manufacture.

Although the exemplary method described above uses specific firing temperatures and times, it will be understood that a variety of other firing or drying temperatures and times are suitable.

The exemplary thermally decomposable gravure offset printing ink composition described above comprises indium tin oxide. However, other conductive metal oxides are suitable. For example, the composition may comprise antimony tin oxide.

The exemplary substrate having transparent electrodes described above is for use in display devices. However, substrates according to the invention may be used in other applications where transparent electrodes are desirable, for example solar cells.

CLAIMS

1. A method of forming transparent electrodes on a substrate, the method comprising the steps of:
 - 5 depositing a patterned layer of a thermally decomposable ink composition on a substrate by gravure offset printing, the thermally decomposable ink composition comprising an electrically conductive metal oxide having a particle size of less than the wavelength of visible light, a nitrocellulose binder, an alcohol solvent and an organic co-solvent having a
10 boiling point of more than 250°C; and
heating the thermally decomposable ink composition.
2. The method of claim 1, wherein heating the thermally decomposable ink composition comprises thermally decomposing the thermally decomposable
15 ink composition.
3. The method of claim 1 or 2, wherein the electrically conductive metal oxide has an average particle size of less than 0.1µm.
- 20 4. The method of any one of claims 1 to 3, wherein the electrically conductive metal oxide has an average particle size in the range 3nm to 80nm.
5. The method of any one of claims 1 to 4, wherein the electrically conductive metal oxide is indium doped tin oxide.
25
6. The method of any one of claims 1 to 5, wherein the solvent comprises at least one of an alkylalcohol, a monoalkyl ethyleneglycol and a monoalkyl propyleneglycol.
- 30 7. The method of any one of claims 1 to 6, wherein the solvent comprises isopropoxyethanol.

8. The method of any one of claims 1 to 7, wherein the organic co-solvent comprises at least one of an acetate, an alkylalcohol, an ester, a mono or dialkyl ether of an ethyleneglycol and a mono or dialkyl ether of a propyleneglycol.

5

9. The method of any one of claims 1 to 8, wherein the organic co-solvent comprises at least one of tri propylene glycol and tetra ethylene glycol.

10

10. The method of any one of claims 1 to 9, further comprising the step of homogenising the thermally decomposable ink composition prior to the step of depositing the patterned layer of the thermally decomposable ink composition.

15

11. The method of any one of claims 1 to 10, wherein the step of depositing the patterned layer of the thermally decomposable ink composition comprises the steps of:

filling patterned grooves in the surface of a cliché with the thermally decomposable ink composition;

20

transferring the thermally decomposable ink composition from the patterned grooves to the surface of a blanket by bringing the blanket in to contact with the surface the cliché; and

transferring the thermally decomposable ink composition from the surface of the blanket to the surface of the substrate by bringing the blanket in to contact with the surface of the substrate.

25

12. The method of any one of claims 1 to 11, wherein the step of heating the thermally decomposable ink composition comprises firing the thermally decomposable ink composition at a temperature of no more than 400°C in the presence of oxygen.

30

13. The method of any one of claims 1 to 12, wherein the step of heating the thermally decomposable ink composition comprises the steps of:

firing the thermally decomposable ink composition in an air atmosphere at a temperature in the range 200°C to 400°C for at least 50 minutes; and

firing the thermally decomposable ink composition in a reducing atmosphere of hydrogen and nitrogen at a temperature in the range 200°C to
5 400°C for at least 50 minutes.

14. A thermally decomposable gravure offset printing ink composition for use in forming transparent electrodes on a substrate, comprising:
an electrically conductive metal oxide having a particle size of less than
10 the wavelength of visible light;
a nitrocellulose binder;
an alcohol solvent; and
an organic co-solvent having a boiling point of more than 250°C.

15 15 The composition of claim 14, wherein the electrically conductive metal oxide has an average particle size of less than 0.1µm.

16. The composition of claim 14 or 15, wherein the electrically conductive metal oxide has an average particle size in the range 3nm to 80nm.
20

17. The composition of any one of claims 14 to 16, wherein the electrically conductive metal oxide is indium doped tin oxide.

18. The composition of any one of claims 14 to 17, wherein the
25 nitrocellulose binder contains from 10.9 to 11.3 wt% nitrogen.

19. The composition of any one of claims 14 to 18, wherein the solvent comprises at least one of an alkylalcohol, a monoalkyl ethyleneglycol and a monoalkyl propyleneglycol.
30

20. The composition of any one of claims 14 to 19, wherein the solvent comprises isopropoxyethanol.

21. The composition of any one of claims 14 to 20, wherein the organic co-solvent comprises at least one of an acetate, an alkylalcohol, an ester, a mono or dialkyl ether of an ethyleneglycol and a mono or dialkyl ether of a propyleneglycol.

22. The composition of any one of claims 14 to 21, wherein the organic co-solvent comprises at least one of tri propylene glycol and tetra ethylene glycol.

23. The composition of any one of claims 14 to 22, wherein the electrically conductive metal oxide is 15 to 25 wt% of the composition.

24. The composition of any one of claims 14 to 23, wherein the nitrocellulose binder is 15 to 25 wt% of the composition.

25. The composition of any one of claims 14 to 24, wherein the solvent is 45 to 60 wt% of the composition.

26. The composition of any one of claims 14 to 25, wherein the organic co-solvent is 5 to 15 wt% of the composition.

27. A substrate having transparent electrodes formed by:
depositing a patterned layer of the composition of any one of claims 14 to 26 on a substrate by gravure offset printing; and
heating the composition to form the transparent electrodes.

28. The substrate of claim 27, wherein heating the composition comprises thermally decomposing the composition.

ABSTRACT

PRINTABLE TRANSPARENT ELECTRODES

5 A method of forming transparent electrodes on a substrate is disclosed. The
method comprises the steps of: depositing a patterned layer of a thermally
decomposable ink composition on a substrate by gravure offset printing, the
thermally decomposable ink composition comprising an electrically conductive
metal oxide having a particle size of less than the wavelength of visible light, a
10 nitrocellulose binder, an alcohol solvent and an organic co-solvent having a
boiling point of more than 250°C; and thermally decomposing the thermally
decomposable ink composition.

[Figure 2]

15



14

15

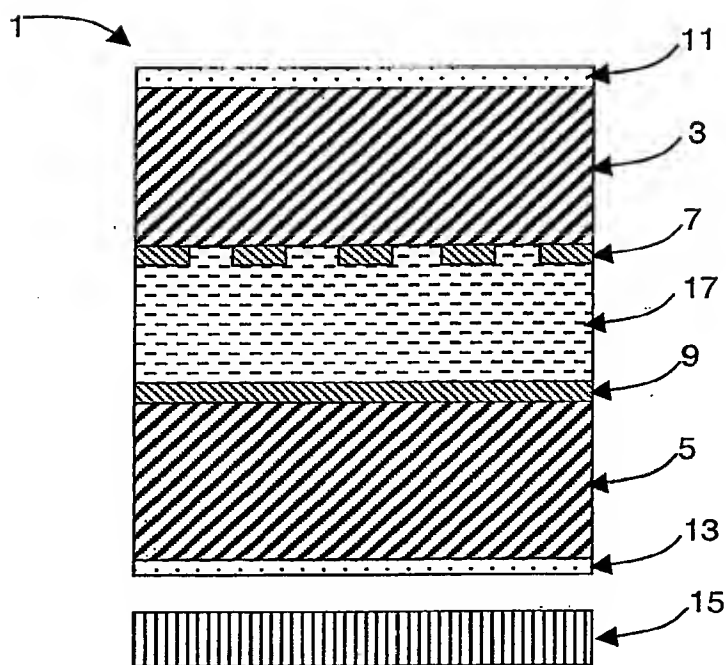


Fig. 1

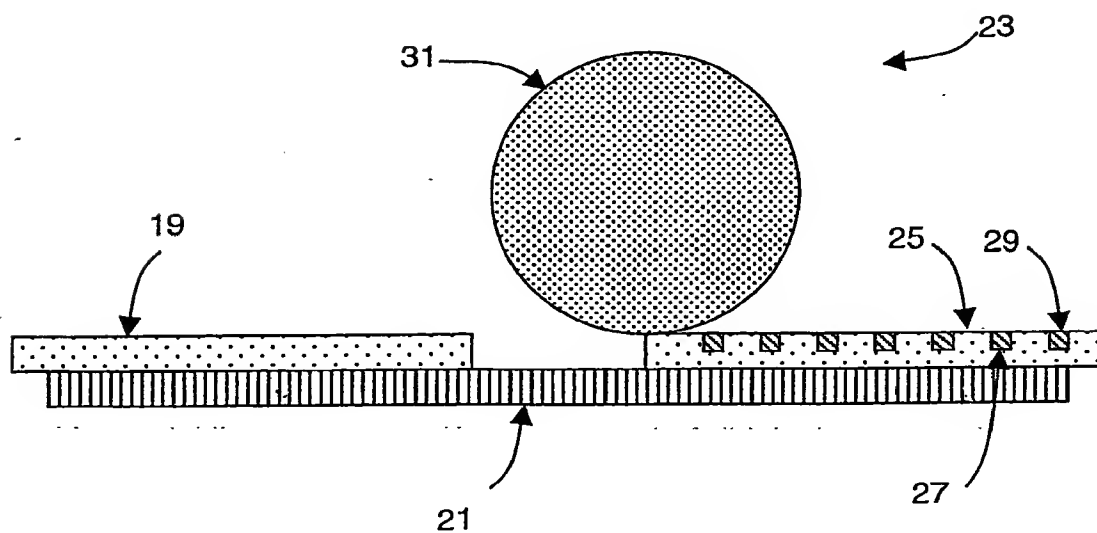


Fig. 2

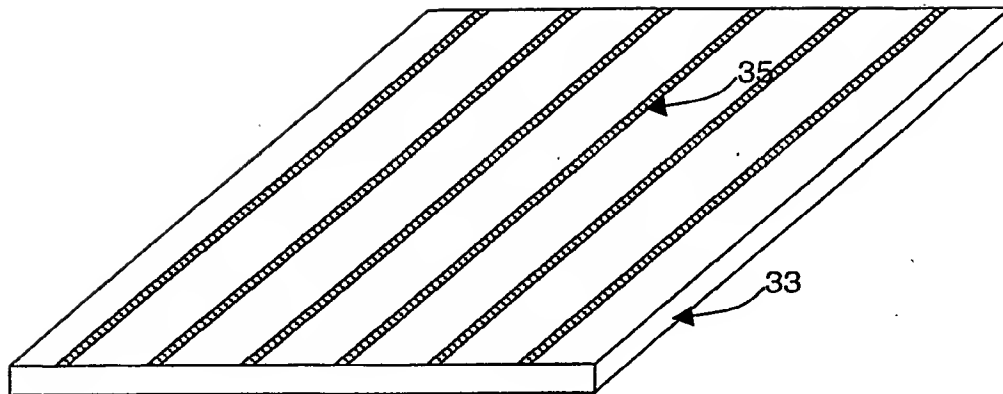


Fig. 3

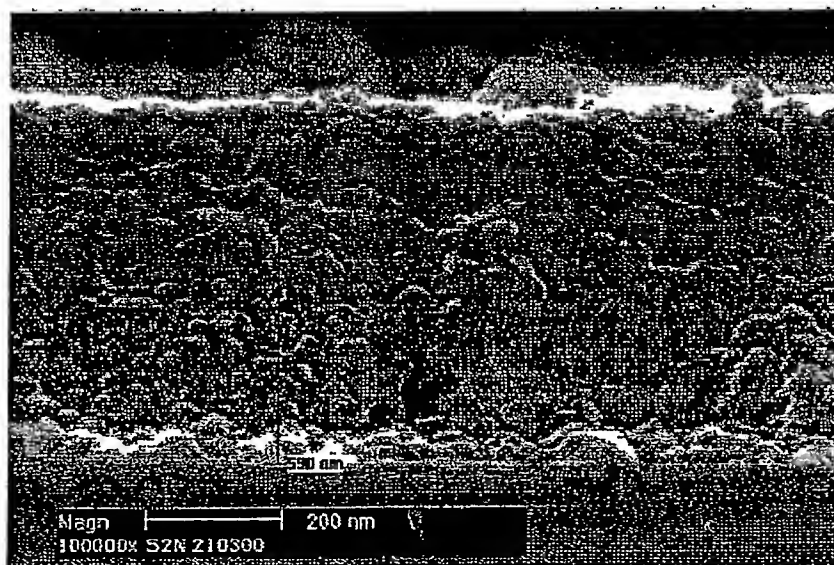


Fig. 4

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record.**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☒ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.